

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 063 642 A2 → A3

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
27.12.2000 Bulletin 2000/52(51) Int. Cl.<sup>7</sup>: G11B 7/007

(21) Application number: 00112386.8

(22) Date of filing: 09.06.2000

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI(72) Inventor: Nakajima, Junsaku  
Kashihara-shi, Nara-ken (JP)(74) Representative:  
MÜLLER & HOFFMANN Patentanwälte  
Innere Wiener Strasse 17  
81667 München (DE)


(30) Priority: 22.06.1999 JP 17491599

(71) Applicant:  
Sharp Kabushiki Kaisha  
Osaka-shi Osaka (JP)

## (54) Optical recording medium

(57) In an optical recording medium in which marks are allowed to be written at grooves (G) and information has been recorded beforehand in the form of prebits (PP) in a prebit area, the medium is constructed so that the groove width,  $W_g$ , the land width,  $W_l$ , and the prebit width,  $W_p$ , satisfy the relationships of either  $W_l < W_g$ ,and  $W_p < W_g$ , or  $W_l > W_g$ , and  $W_p > W_g$ . Alternatively or additionally to the above, a sum of lengths of pit-presence portions in the prebit area is larger than a sum of lengths of pit-absence portions in the prebit area.

Fig. 1

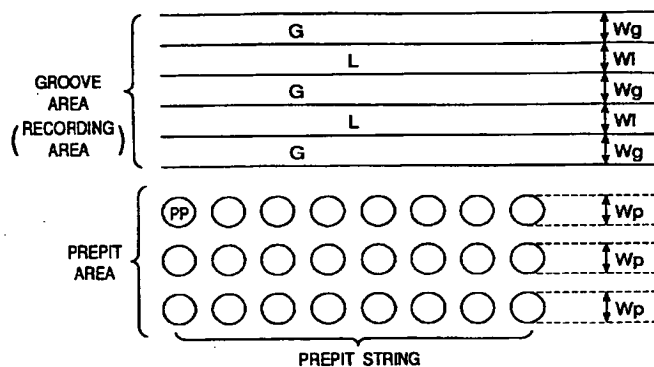

EP 1 063 642 A2

## Description

## BACKGROUND OF THE INVENTION

5 [0001] The present invention relates to recordable (once-writable) and rewritable information-recording media, and more particularly, to optical discs.

[0002] Recently, the densification of such optical discs, which are used as recording devices for computers, or package media for music and image information, has been advanced. In order to have precise, high-speed access to such high-density tracks, it is necessary to provide preformatted signals having address information to a recording surface of the optical disc, to and from which surface information is recorded and reproduced. Further, information that one does not want to erase can also be formed in advance as preformatted signals on the disc. Portions other than the preformatted portions are a recording area in which guide grooves referred to as simply 'grooves' are formed. In the groove area, namely, in the recording area, grooves that are concave portions and lands that are not concave portions exist.

10 [0003] Figs. 5A and 5B show a disc of related art, and are a top view and a perspective view of the disc, respectively. In Fig. 5B, a cross section of the disc is also shown. Reference symbols 'G' and 'L' indicate a groove and a land, respectively. Reference symbol 'PP' indicates a prepit. Light 3 (typically, a laser beam) is condensed by a lens 2 and then incident through a substrate 1. Comparing the land with the groove, the groove is nearer to the lens 2.

[0004] A recording layer of a material represented by a magneto-optical material, a phase-change material or an organic dye material is formed (not shown in the figures) on the lands, grooves, and prepits. In the figures, a recording mark M is written in the groove. This is because better signals in quality are obtained when the information is written in the grooves than when written on the lands.

15 [0005] When recording/reproducing information onto/from the optical disc on which the guide grooves are formed as described above, tracking servo control is implemented by a push-pull method using a servo control signal called the 'push-pull signal' resulting from the diffraction of light at the grooves and prepits. A light beam ('beam spot') condensed by the lens 2 tracks on the grooves and prepits.

[0006] Generally, the push-pull signal in the prepit area has a smaller amplitude than the push-pull signal in the groove area. The reason for that is as follows. The structure of the prepit area in which concave portions are spaced from each other is equivalent to the structure of a broken, or discontinuous groove. Therefore, in the prepit area, due to the discontinuity of the concave portions, the amount of diffraction of light is reduced accordingly on the average. This is why that the amplitude of the push-pull signal is smaller in the prepit area than in the groove area.

20 [0007] Accordingly, if the gain of the tracking servo control is adjusted so that it is suitable for the groove area, the amplitude of the push-pull signal in the prepit area becomes too small. Therefore, the gain of the tracking servo control is relatively small for the prepit area, and the control precision deteriorates. In contrast, if the gain of the tracking servo control is adapted to the prepit area, the amplitude of the push-pull signal in the groove area becomes excessively large. Thus, disadvantageously, oscillation occurs in the tracking servo system.

## SUMMARY OF THE INVENTION

30 [0008] The present invention has been made in order to solve the above problems, and the object of the present invention is to provide a highly reliable optical recording medium with a prepit area wherein recording is implemented at least at grooves, and push-pull signals obtained in a groove area (recording area) and a prepit area have similar magnitudes so that precise tracking can be implemented without deterioration of control precision nor occurrence of oscillation of the tracking servo control system, whereby complication of the circuitry of a recording/reproducing device and the increase of the costs of such a device can be avoided.

40 [0009] In order to accomplish the above object, according to an aspect of the present invention, there is provided an optical recording medium, comprising a substrate having a recording area, composed at least of lands and grooves, and a prepit area in which information has been recorded beforehand in the form of prepits, the recording area being recordable at least at the grooves among the lands and grooves,

50 the optical recording medium being constructed such that a width of each groove,  $W_g$ , a width of each land,  $W_l$ , and a width of each prepit,  $W_p$ , satisfy the following relationships of:

$$\text{either } W_l < W_g, \text{ and } W_p < W_g, \text{ or } W_l > W_g, \text{ and } W_p > W_g.$$

55 [0010] With this arrangement, the amplitudes of the push-pull signals from the recording area (groove area) and the prepit area can be made equivalent to each other or little different from each other. Thus, it becomes possible to achieve accurate tracking servo control. Accordingly, there is an effect that it is possible to prevent the complication of the circuitry and the cost increase of a recording/reproducing apparatus for the optical recording medium.

[0011] According to another aspect of the present invention, there is provided an optical recording medium, comprising a substrate having a recording area, composed at least of lands and grooves, and a prepit area in which information has been recorded beforehand in the form of prepits, the recording area being recordable at least at the grooves among the lands and grooves,

wherein a sum of lengths of pit-presence portions in the prepit area is larger than a sum of lengths of pit-absence portions in the prepit area.

[0012] The inventor of this invention has found that by increasing duty of prepits (also referred to as simply 'pits') which is calculated from (the sum of lengths of the pit-presence portions in the prepit area)/(the sum of lengths of the pit-presence portions and pit-absence portions in the prepit area), it is possible to increase the amplitude of the push-pull signal from the prepit area. The optical recording medium with this arrangement has duty of prepits of more than 50 %. Thus, even if the prepit width is same as the groove width so that there is a difference in amplitude of the push-pull signal between the groove area and the prepit area, the difference can be decreased. As a result, it is possible to achieve accurate tracking servo control. Furthermore, because the same width can be used for the grooves and the prepits for the above reason, the optical recording medium can be simply fabricated.

[0013] The above characteristic features of the first and second aspects of the present invention may be combined so that not only the widths of the grooves and prepits but also the duty of prepits are changed. In this case, freedom is increased in designing the optical recording medium such that there is no difference or little difference between the amplitudes of the push-pull signals from the groove area and the prepit area.

[0014] Other objects, features and advantages of the present invention will be obvious from the following description.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0015] The present invention will become more fully understood from the detailed description given hereinbelow and the accompanying drawings which are given by way of illustration only, and thus are not limitative of the present invention, and wherein:

Fig. 1 is an illustration explaining a disc having a groove area and a prepit area according to the present invention

Fig. 2 is a graph showing the relationship between the groove/prepit widths and the amplitude of the push-pull signal in the optical recording medium of the present invention;

Fig. 3 shows a graph showing the relationship between the groove/prepit widths and the amplitude of the push-pull signal for different duties of pits in the prepit area in the optical recording medium of the present invention;

Fig. 4 is an illustration for explaining the duty of pits in the prepit area of the optical recording medium according to the present invention; and

Figs. 5A and 5B schematically show an optical recording medium according to related art.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0016] Hereinafter, a concrete example to which the present invention has been applied and a comparative example will be described in detail with reference to the drawings.

[0017] Using an optical system comprising a laser beam having a wavelength of 650 nm and a lens with an NA (numerical aperture) of 0.6, experiments were conducted on discs having various groove widths,  $W_g$ , and prepit widths,  $W_p$ , at a tracking pitch (the distance between grooves, namely,  $W_g + W_l$ ) of 0.74  $\mu\text{m}$ .

[0018] The grooves G and prepits PP each have a depth of 30 nm. For the recording layer, GeSbTe, which is a phase-change material, was used. Each disc was rotated at a linear velocity of 3.5 m/s for recording and reproducing.

#### [Embodiment 1]

[0019] Embodiment 1 is described below with reference to Figs. 1 and 2.

[0020] Discs having different groove widths,  $W_g$ , land widths,  $W_l$ , and prepit widths,  $W_p$ , (see Fig. 1) were first prepared, with their groove depths and prepit depths fixed to the above-mentioned values, respectively. Then, a test of these discs was carried out to measure the amplitudes of the push-pull signals from the groove area (namely, recording area) and the prepit area.

[0021] Fig. 1 is an explanatory illustration showing a part of an optical disc prepared. As shown in this figure, the groove area includes alternate grooves G and lands L, and the prepit area includes strings of prepits PP (referred to also as simply 'pits'). The grooves/lands define concentric circles or a helix together with the prepit strings, although not shown in the figures.

[0022] In the test, amplitudes of push-pull signals were measured when a light beam spot traversed the prepit area

and the groove area arrayed as shown in Fig. 1 on the individual discs. (Note here that the sum of  $W_g$  and  $W_l$  defines a track pitch and was constant at a value of  $0.74\ \mu\text{m}$  in this embodiment.)

[0023] Fig. 2 is a graph showing the measurement results. In the graph, the axis of abscissas indicates the groove width,  $W_g$ , and the prepit width,  $W_p$ , and the axis of ordinates indicates the amplitude of the push-pull signal for  $W_g$  and  $W_p$ .

[0024] The biggest push-pull signal amplitude was obtained from the groove area when  $W_g = W_l = 0.37\ \mu\text{m}$ . For this reason, the values of the amplitude of the push-pull signal have been normalized, using, as a value of 1, the amplitude of the push-pull signal obtained from the groove area when  $W_g = W_l = 0.37\ \mu\text{m}$ , and the axis of ordinates of Fig. 2 is scaled accordingly. Again, the sum of  $W_g$  and  $W_l$  was  $0.74\ \mu\text{m}$ , as described before. In addition, the discs tested were under condition that a distance between center lines of adjacent prepit strings, namely, a pitch in an axial direction of the prepits, was also constant at  $0.74\ \mu\text{m}$ , which value was equal to the sum of  $W_g$  and  $W_l$ .

[0025] Naturally, it is one of conditions that should be avoided that the prepit width,  $W_p$ , is equal to or larger than the sum of  $W_g$  and  $W_l$  (a track pitch:  $0.74\ \mu\text{m}$  in this example). This is because if so, the adjacent prepit strings will touch or overlap each other.

[0026] As is obvious from Fig. 2, when  $W_g = W_p$ , the amplitude of the push-pull signal is smaller in the prepit area (indicated with solid line in the figure) than in the groove area (indicated with broken line in the figure), and generally the former is about half the latter. This difference in the push-pull signal amplitude between the prepit area and the groove area has caused the above-mentioned problem relating to the tracking servo control. Fig. 2, however, indicates that such a problem can be solved by making the groove width,  $W_g$ , different from the prepit width,  $W_p$ .

[0027] Let us consider this by way of example. If the groove width,  $W_g$ , is  $0.22\ \mu\text{m}$ , the push-pull signal of the groove area has an amplitude of 0.5 after normalized. A similar amplitude is provided by a push-pull signal derived from the prepit area when the prepit width,  $W_p$ , is  $0.37\ \mu\text{m}$ . Therefore, if an optical disc (an optical recording medium) is formed such that  $W_g = 0.22\ \mu\text{m}$ ,  $W_p = 0.37\ \mu\text{m}$ , and that  $W_l = 0.52\ \mu\text{m}$  (this value is obtained from  $W_g + W_l = 0.74\ \mu\text{m}$ ), it follows that push-pull signals having similar amplitudes will be obtained both from the groove area and from the prepit area.

[0028] In addition, if  $W_g = 0.53\ \mu\text{m}$ ,  $W_p = 0.37\ \mu\text{m}$ , and  $W_l = 0.21\ \mu\text{m}$  (this value is obtained from  $W_g + W_l = 0.74\ \mu\text{m}$ ), push-pull signals from the groove area and the prepit area will also have similar amplitudes.

[0029] There are other combinations of  $W_g$ ,  $W_p$ , and  $W_l$  that allow the push-pull signals from the groove area and the prepit area to have almost equal amplitudes, or slightly different amplitudes. Such combinations exist under the following formularized conditions:

$$W_l > W_g, \text{ and } W_p > W_g,$$

or alternatively,

$$W_l < W_g, \text{ and } W_p < W_g$$

[Embodiment 2]

[0030] Various optical discs were prepared by changing the duty of the prepit area while maintaining the prepit width,  $W_p$ , at a constant value ( $0.37\ \mu\text{m}$ ). Then, amplitudes of push-pull signals of the optical discs were measured. Fig. 3 shows the measurement results.

[0031] The 'duty' here means a rate of occupation of pit-presence portions in the prepit area, and is calculated from (the total length of the pit-presence portions)/(the sum of the total length of the pit-presence portions and the total length of the pit-absence portions). As is obvious from Fig. 3, the larger the duty, the larger the push-pull signal. The duty of 100 % of the prepit area represents the state in which pits are not separated from each other, or rather a single pit extends continuously. In other words, the prepit area having the duty of 100 % is equivalent to the groove, and this value of the duty allows a push-pull signal to have the largest amplitude.

[0032] In Embodiment 2, the prepit width,  $W_p$ , is  $0.37\ \mu\text{m}$  (the track pitch is  $0.74\ \mu\text{m}$  as in Embodiment 1). Even if the prepit width,  $W_p$ , is changed from this value, there remains the inclination that the larger duty provides the larger amplitude of the push-pull signal, although the maximum value of the amplitude depends on the prepit width. The axis of ordinates of the graph in Fig. 3 indicates normalized values of amplitudes of the individual push-pull signal derived from various duties at the given prepit width,  $W_p$ , ( $0.37\ \mu\text{m}$  in this case), wherein normalization has been done using, as a value of 1, the amplitude of the push-pull signal derived from the duty of 100 %.

[0033] In Embodiment 1, description has been made of a technique of making the groove width,  $W_g$ , and the prepit width,  $W_p$ , different from each other to obtain push-pull signals of almost same amplitudes in both the groove area and the prepit area.

[0034] On the other hand, it is understood from Fig. 3 of Embodiment 2 that changing the duty of prepits allows the

amplitude of the push-pull signal in the prepit area to be changed. That is, even when the groove width,  $W_g$ , is equal to the prepit width,  $W_p$ , a difference in the amplitude of the prepit signal between the prepit area and the groove area can be reduced by appropriately changing the duty of the prepit area. More specifically, the duty of the prepit area should be increased.

5 [0035] According to the technique of Embodiment 2, although the duty of pits is changed, the prepit width,  $W_p$ , can be the same as the groove width,  $W_g$ . Therefore, the optical discs (optical recording media) of the present embodiment can be simply fabricated.

[0036] The pit width may be, of course, designed to be different from the groove width, as in Embodiment 1.

10 [0037] When adopting such a design, parameters for balancing the amplitude of the push-pull signal in the groove area with that of the push-pull signal in the prepit area include not only the pit width and the groove width, but also the duty of pits. As a result, freedom of design increases, as compared with the technique of Embodiment 1.

[0038] The above embodiments have been explained in connection with only the optical discs (optical recording media) in which data are recorded only at grooves. It is also possible to record data on lands besides the grooves, and thus the present invention is applicable to so-called land-groove recording discs. Note that the above discussion holds true for the push-pull signal derived from the land because the push-pull signal derived from the land has the same amplitude as that of the push-pull signal derived from the groove, although the phase of the signal is reversed. Similarly, the above discussion holds true for the push-pull signal derived from between the prepit strings because the push-pull signal derived from between the prepit strings has the same amplitude as that of the push-pull signal derived from the prepit string, although the phase of the signal is reversed.

20 [0039] Further, in the above embodiments, an optical system having a wavelength of 650 nm and a numerical aperture (NA) of 0.6 is used. It is evident, however, that the effects of the present invention are not limited by the optical system. Furthermore, the track pitch, the groove width and the prepit width are not limited to the values shown above. Needless to say, following the gist of the present invention, it is possible to arrange various combinations of widths within the range as set forth in claims.

25 [0040] The invention being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the following claims.

#### Claims

30 1. An optical recording medium, comprising a substrate having a recording area, composed at least of lands (L) and grooves (G), and a prepit area in which information has been recorded beforehand in the form of prepits (PP), said recording area being recordable at least at the grooves (G) among said lands and grooves,

35 said optical recording medium being constructed such that a width of each groove (G),  $W_g$ , a width of each land (L),  $W_l$ , and a width of each prepit (PP),  $W_p$ , satisfy the following relationships of:

either  $W_l < W_g$ , and  $W_p < W_g$ , or  $W_l > W_g$ , and  $W_p > W_g$ .

40 2. An optical recording medium according to claim 1, wherein a sum of lengths of pit-presence portions in said prepit area is larger than a sum of lengths of pit-absence portions in said prepit area.

3. An optical recording medium, comprising a substrate having a recording area, composed at least of lands (L) and grooves (G), and a prepit area in which information has been recorded beforehand in the form of prepits (PP), said recording area being recordable at least at the grooves (G) among said lands and grooves,

45 wherein a sum of lengths of pit-presence portions in said prepit area is larger than a sum of lengths of pit-absence portions in said prepit area.

4. An optical recording medium according to claim 3, wherein a groove width,  $W_g$ , is same as a prepit width,  $W_p$ .

50

55

*Fig. 1*

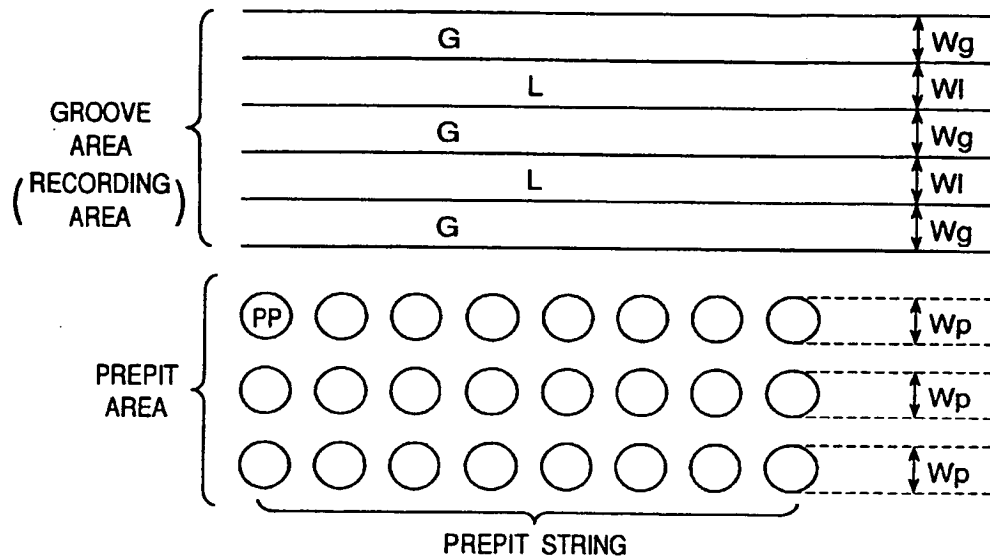


Fig.2

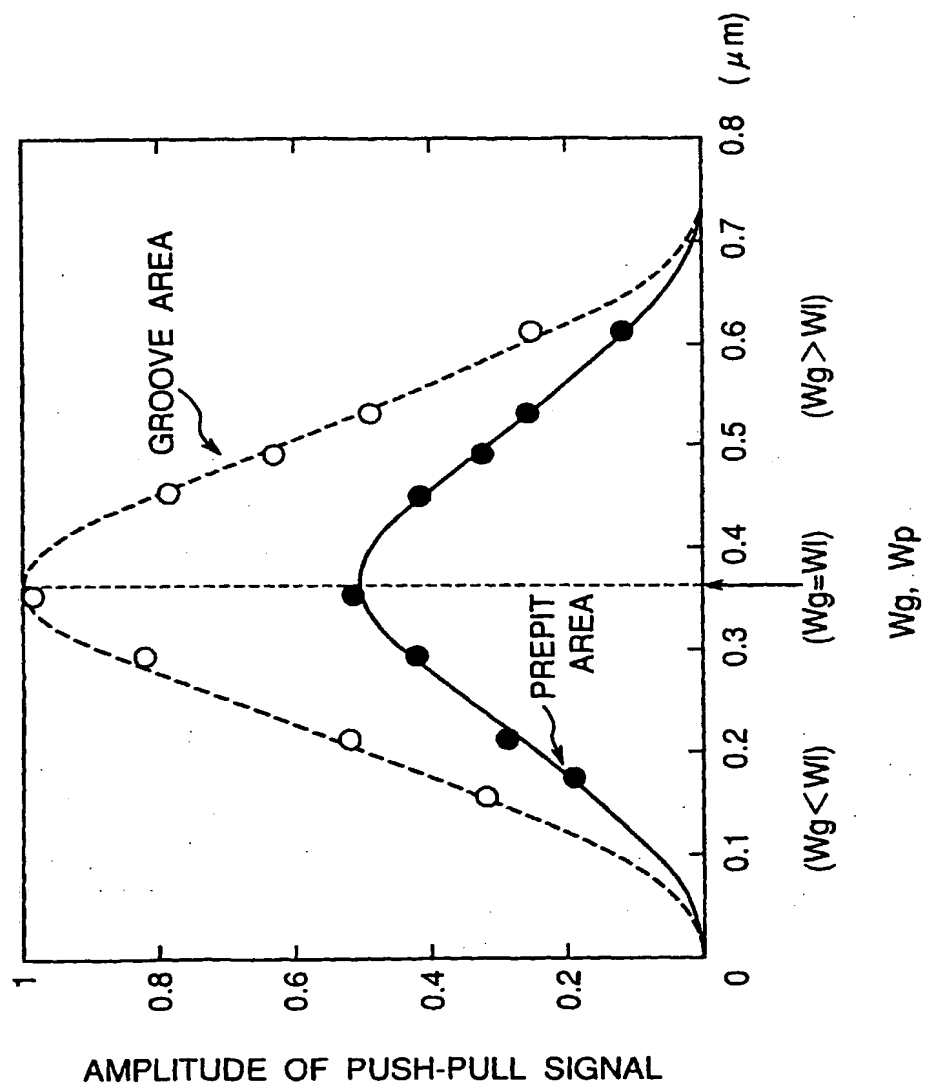
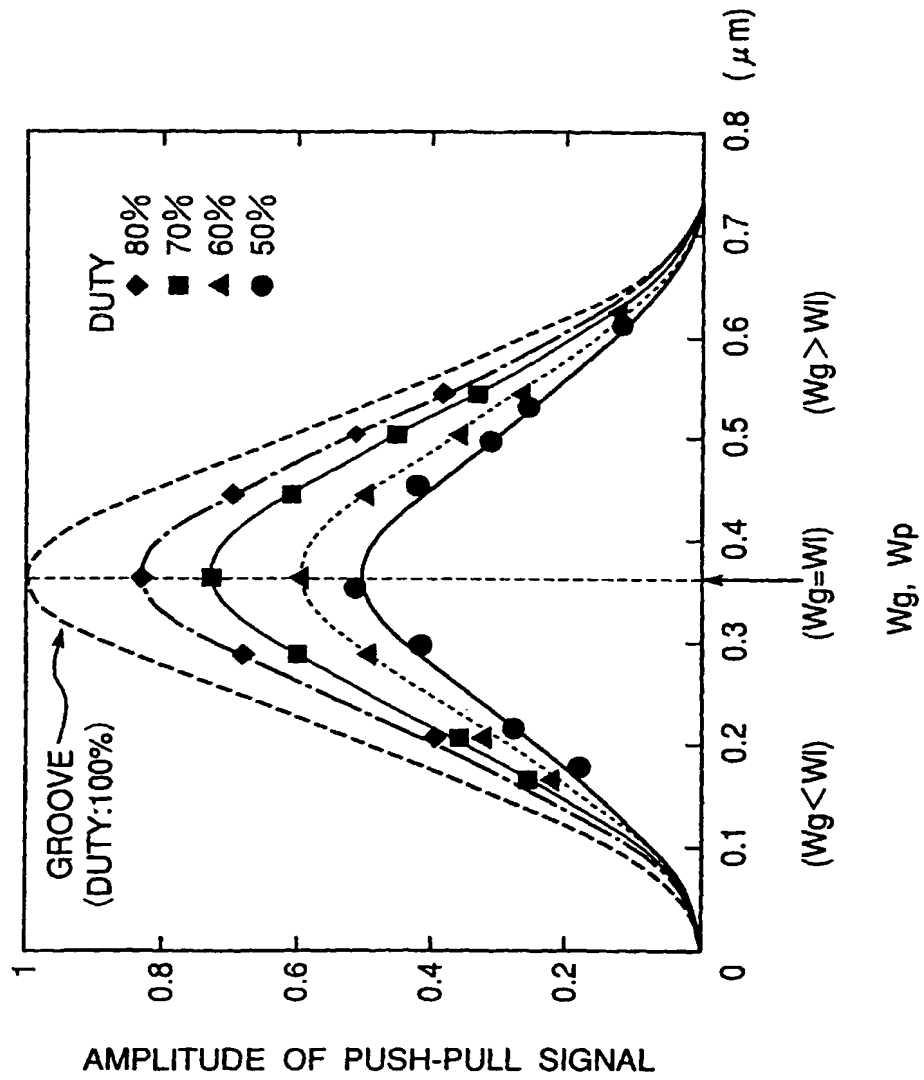
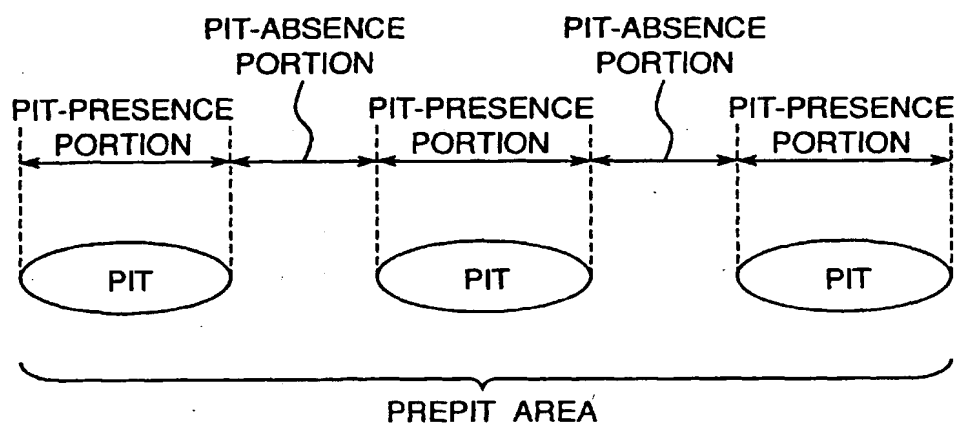


Fig.3

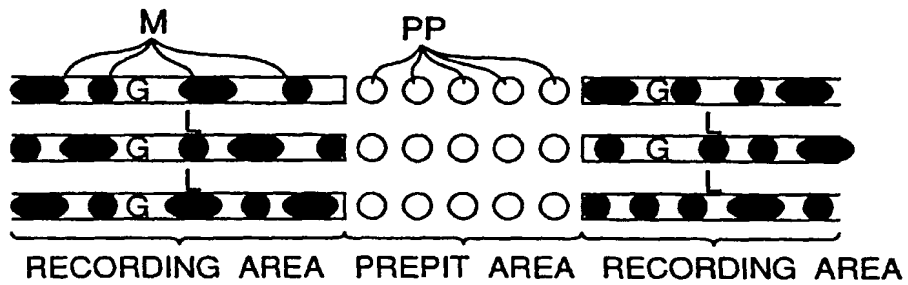





*Fig.4*



*Fig.5A RELATED ART*



*Fig.5B RELATED ART*

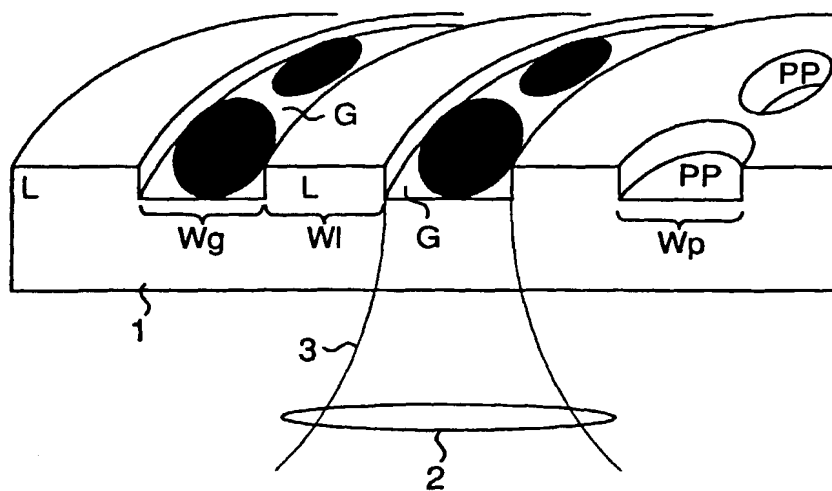

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 063 642 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
31.03.2004 Bulletin 2004/14

(51) Int Cl.7: G11B 7/007, G11B 7/013,  
G11B 7/09

(43) Date of publication A2:  
27.12.2000 Bulletin 2000/52

(21) Application number: 00112386.8

(22) Date of filing: 09.06.2000

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Nakajima, Junsaku  
Kashihara-shi, Nara-ken (JP)

(74) Representative: Müller - Hoffmann & Partner  
Patentanwälte,  
Innere Wiener Strasse 17  
81667 München (DE)

(30) Priority: 22.06.1999 JP 17491599


(71) Applicant: Sharp Kabushiki Kaisha  
Osaka-shi Osaka (JP)

(54) Optical recording medium

(57) In an optical recording medium in which marks are allowed to be written at grooves (G) and information has been recorded beforehand in the form of prepits (PP) in a prepit area, the medium is constructed so that the groove width, Wg, the land width, Wl, and the prepit

width, Wp, satisfy the relationships of either  $Wl < Wg$ , and  $Wp < Wg$ , or  $Wl > Wg$ , and  $Wp > Wg$ . Alternatively or additionally to the above, a sum of lengths of pit-presence portions in the prepit area is larger than a sum of lengths of pit-absence portions in the prepit area.

Fig. 1

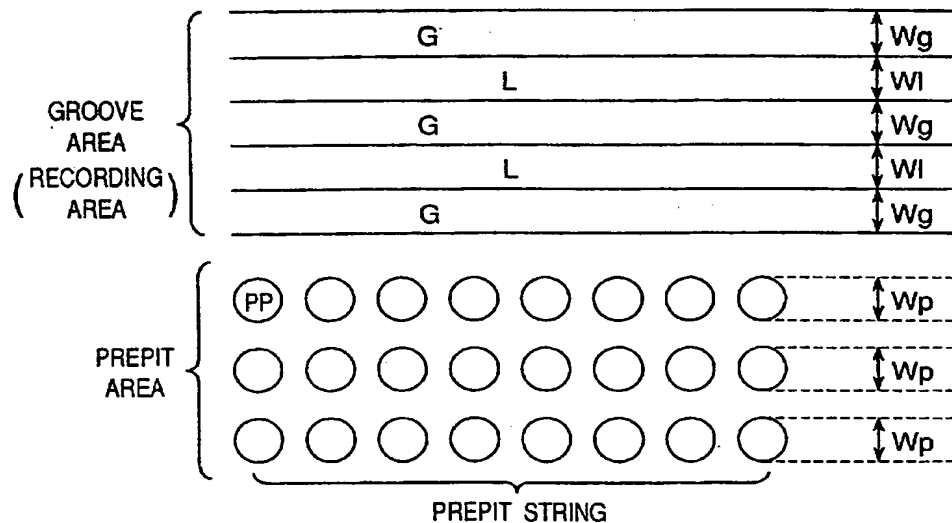

EP 1 063 642 A3



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 00 11 2386

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	JP 11 126372 A (PIONEER ELECTRON CORP; PIONEER VIDEO CORP) 11 May 1999 (1999-05-11) * the whole document *	1	G11B7/007 G11B7/013 G11B7/09
Y		2	
A		3,4	
	& US 6 128 271 A (OHTA MINEMASA) 3 October 2003 (2003-10-03) * abstract * * column 1, line 40 - column 2, line 16 * * column 3, line 13 - line 26 * * column 4, line 6 - line 19 * * figures 1,2 *		
Y	EP 0 809 240 A (SONY CORP) 26 November 1997 (1997-11-26) * abstract *	2-4	
A	* column 1, line 33 - column 2, line 25 * * column 3, line 20 - column 7, line 17 * * column 9, line 40 - column 10, line 50 * * figures 10,11 *	1	
Y	EP 0 752 701 A (MATSUSHITA ELECTRIC IND CO LTD) 8 January 1997 (1997-01-08) * abstract * * claims 1,15 * * figures 7,11,19-22 *	3,4	TECHNICAL FIELDS SEARCHED (Int.Cl.7) G11B
A		1,2	
X	US 5 204 852 A (NAKAGAWA EIJI ET AL) 20 April 1993 (1993-04-20) * abstract *	1	
A	* column 8, line 17 - column 11, line 5 * * figures 5,6 *	2-4	
A	EP 0 740 289 A (MATSUSHITA ELECTRIC IND CO LTD) 30 October 1996 (1996-10-30) * the whole document *	1-4	
	---		
	-/--		
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 5 February 2004	Examiner Skaropoulos, N
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03 82 (P04C01)



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 00 11 2386

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EP 0 727 779 A (HITACHI LTD) 21 August 1996 (1996-08-21) * abstract * * column 2, line 6 - column 4, line 56 * * column 5, line 30 - column 7, line 31 * * figures 1,2,6 *	1-4	
A	US 5 737 307 A (SHIMIZU AKIHIKO) 7 April 1998 (1998-04-07) * column 18, line 55 - column 20, line 8 * * figures 18-21 *	1-4	
A	US 5 107 486 A (INUI TETSUYA ET AL) 21 April 1992 (1992-04-21) * the whole document *	1-4	
A	US 5 666 345 A (TAKAHASHI AKIRA ET AL) 9 September 1997 (1997-09-09) * the whole document *	1-4	
A	PATENT ABSTRACTS OF JAPAN vol. 016, no. 078 (P-1317), 25 February 1992 (1992-02-25) & JP 03 266236 A (MATSUSHITA ELECTRIC IND CO LTD), 27 November 1991 (1991-11-27) * abstract *	1-4	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>5 February 2004</b>	Examiner <b>Skaropoulos, N</b>
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 01/02 (p.04/07)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 11 2386

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-02-2004

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
JP 11126372	A	11-05-1999	US	6128271 A	03-10-2000
EP 0809240	A	26-11-1997	JP	9306034 A	28-11-1997
			DE	69701766 D1	31-05-2000
			DE	69701766 T2	17-08-2000
			EP	0809240 A2	26-11-1997
			US	5838654 A	17-11-1998
EP 0752701	A	08-01-1997	CN	1146591 A ,B	02-04-1997
			DE	69616885 D1	20-12-2001
			DE	69616885 T2	06-06-2002
			DE	69625095 D1	09-01-2003
			DE	69625095 T2	25-09-2003
			EP	0752701 A2	08-01-1997
			EP	0984435 A2	08-03-2000
			JP	9147366 A	06-06-1997
			KR	274294 B1	15-12-2000
			US	2002064105 A1	30-05-2002
			US	2003058757 A1	27-03-2003
			US	6118752 A	12-09-2000
US 5204852	A	20-04-1993	JP	2580820 B2	12-02-1997
			JP	3241538 A	28-10-1991
			JP	4177636 A	24-06-1992
			JP	2530255 B2	04-09-1996
			JP	4205738 A	27-07-1992
EP 0740289	A	30-10-1996	JP	8293129 A	05-11-1996
			CN	1144372 A ,B	05-03-1997
			DE	69623378 D1	10-10-2002
			DE	69623378 T2	09-01-2003
			EP	0740289 A1	30-10-1996
			US	5793741 A	11-08-1998
EP 0727779	A	21-08-1996	JP	2788022 B2	20-08-1998
			JP	8221821 A	30-08-1996
			DE	69612577 D1	31-05-2001
			DE	69612577 T2	23-08-2001
			DE	69624013 D1	31-10-2002
			DE	69624013 T2	02-10-2003
			DE	69625257 D1	16-01-2003
			DE	69625257 T2	28-08-2003
			EP	1085507 A2	21-03-2001
			EP	1282118 A2	05-02-2003
			EP	0727779 A1	21-08-1996
			EP	0999544 A2	10-05-2000

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 11 2386

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-02-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0727779	A		JP 3406285 B2	12-05-2003
			JP 2001110092 A	20-04-2001
			US 2002057644 A1	16-05-2002
			US 5878008 A	02-03-1999
			US 2002071379 A1	13-06-2002
			US 2002071368 A1	13-06-2002
			US 2002071369 A1	13-06-2002
			US 2002071370 A1	13-06-2002
			US 2002071371 A1	13-06-2002
			US 2002085483 A1	04-07-2002
			US 2002071372 A1	13-06-2002
			US 2002089921 A1	11-07-2002
			US 2002085484 A1	04-07-2002
			US 2002071373 A1	13-06-2002
			US 2002071374 A1	13-06-2002
			US 2002089900 A1	11-07-2002
			US 6064644 A	16-05-2000
			US 5953310 A	14-09-1999
			US 2003086351 A1	08-05-2003
			US 6229786 B1	08-05-2001
			US 6195316 B1	27-02-2001
			US 2003193862 A1	16-10-2003
			US 2003210636 A1	13-11-2003
			US 6262968 B1	17-07-2001
			US 5805565 A	08-09-1998
			US 2001005353 A1	28-06-2001
			US 2001010665 A1	02-08-2001
			US 2001010666 A1	02-08-2001
			US 2001043547 A1	22-11-2001
			US 5898663 A	27-04-1999
US 5737307	A	07-04-1998	JP 3150014 B2	26-03-2001
			JP 7029186 A	31-01-1995
			JP 7057279 A	03-03-1995
			JP 7182677 A	21-07-1995
			US 5812520 A	22-09-1998
			US 5822286 A	13-10-1998
			US 5638354 A	10-06-1997
US 5107486	A	21-04-1992	JP 1707429 C	27-10-1992
			JP 3075941 B	03-12-1991
			JP 62132252 A	15-06-1987
US 5666345	A	09-09-1997	DE 3876544 D1	21-01-1993
			DE 3876544 T3	29-04-1999
			EP 0306324 A1	08-03-1989

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

EP 00 11 2386

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-02-2004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5666345 A		JP 1165052 A	29-06-1989
		JP 2644840 B2	25-08-1997
JP 03266236 A	27-11-1991	JP 2755355 B2	20-05-1998

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**